

Also available: **Snow Blower Attachment SN400MP**



SN400MP +UX01G



Work area (approx)
on full battery charge *


48m²

with UX01G (High mode) /
BL4040 battery

* When clearing snow with an approx
density of 150g/L and an
accumulation of 150mm
(The value varies depending on snow
conditions, working speed, etc.)

Snow throwing direction can be changed

The direction of snow throwing can be changed (up
to 30° to the left or right) by adjusting the angle of
the louvers with the louver angle adjustment lever.

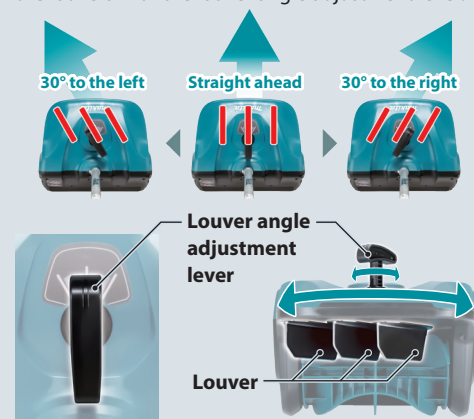

Clear snow according to its condition

Fresh snow

Powdery and easily
collapsible snow
[Density: 50-150g/L]



Compacted snow

Snow that has become
slightly hardened a few
days after falling as fresh
snow [Density: 150-300g/L]



No load speed			Snow throwing distance			Continuous use Battery: BL4040			Work area Battery: BL4040			Shovel diameter	Snow clearing width	Max snow clearing height	Snow throwing angle adjustment	Dimensions (L x W x H)	Net weight
High	Med	Low	High	Med	Low	High	Med	Low	High	Med	Low						
0-1,860 min ⁻¹	0-1,560 min ⁻¹	0-1,080 min ⁻¹	12m (39 ft)	7m (23 ft)	5m (16 ft)	7.1 min.	12 min.	25 min.	48m ²	63m ²	115m ²	150 mm (5-7/8")	300 mm (11-3/4")	300 mm (11-3/4")	30° to the left and right	1,756 x 384 x 343 mm (69 x 15-1/8 x 13-1/2")	9.1 - 10.3 kg (20 - 23 lbs.)

Charging Time

	Fast Charging DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
*1BL4040/F 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Snow Blower

SN001G

- Variable Speed
- Brake
- Constant Speed
- Built-in Job Light

Standard Equipment :

Packable cover, Snow and ice remover,
Battery, Charger

Snow clearing width	530 mm (20-7/8")
Max snow throwing distance	10 m (32.8 ft)
Max snow clearing height	300 mm (11-3/4")
Continuous use (Battery)	20 min.
Work area (Battery)	135 m ²
No load speed	1,400 - 2,100 min ⁻¹
Auger diameter	178 mm (7")
Snow throwing angle adjustment	Horizontal: Angle range: 180° (Electric, Stepless) Vertical: Angle range: 20 - 60 (Manual, 9 stages)
Wheel diameter	180 mm (7-1/8")
Vibration level	2.5 m/s ² or less (ISO8437-4)
Uncertainty (K) for Vibration	1.5 m/s ² (ISO8437-4)
Sound pressure level	70 dB (A) or less (ISO8437-4)
Uncertainty (K) for Noise	3 dB (A) (ISO8437-4)
Dimensions (L x W x H)	1,370 x 540 x 975 mm (54 x 21-1/4 x 38-3/8")
Dimensions (folded)	800 x 540 x 700 mm (31-1/2 x 21-1/4 x 27-1/2")
Net weight (Battery)	17.6 - 18.8 kg (38.8 - 41.4 lbs.)
	BL4020 - BL4080F

The net weight value includes the lightest and heaviest combination of the attachments and battery cartridges which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202508



www.makita.com

Easy snow removal with cordless power



Work area (approx)*
on full battery charge

135m²

With BL4080F battery


*When clearing snow with an approx. density of
150g/L and an accumulation of 200mm (The value
varies depending on snow conditions, working
speed, etc.)



Electric

180° adjustable discharge direction

The snow throwing direction can be steplessly adjusted within a 180° range (90° left and right) using the switch located near the handle.

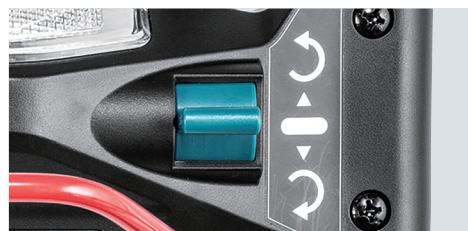

Rotation speed adjustment

The rotation speed can be steplessly adjusted, allowing for adjustment of the snow throwing distance and enabling energy-saving operation in light snow conditions.



Manual

Max snow throwing distance: 10m

The snow throwing range can be adjusted by manually adjusting the deflector angle at the top of the discharge chute.

Angle range: 20° - 60° (9 stages)



Work area (approx)*
on full battery charge

135 m²

With BL4080F battery

Continuous use*
on full battery charge

20 min.

With BL4080F battery

*When clearing snow with an approx. density of 150g/L and an accumulation of 200mm (The value varies depending on snow conditions, working speed, etc.)

Recommended snow types

Fresh snow
Highly recommended

Packed snow
Suitable

Melting snow
Suitable

LED lights

The LED lights provide wide illumination from your feet to the path ahead.



Foldable handle

The handle can be folded at two points—midway and at the base—by loosening the knobs, allowing the machine to be stored compactly.



Snow and ice remover

Use a manual snow removal tool that helps clear snow and ice accumulated in the snow intake hood (auger hood) and discharge chute housing.



Covering

The packable cover provides years of carefree protection against dust and sun damage. An elasticized bottom keeps the cover stable in wind.



Cordless Snow Blower SN001G

Single-stage auger

Equipped with a single-stage auger for both snow intake and discharge, the machine is lightweight and compact, suitable for light snowfall and small snow accumulations.

**Powered by 40Vmax
XGT Li-ion battery**



BL MOTOR XPT

Snow clearing height
300 mm

Snow clearing width
530 mm